

Verification of Conformity

Registration No.

Report No.


13FAB05048 0552

13FAB05048 11

**Verification of Conformity**

This Verification of Compliance is hereby issued to the product designated below

Responsible Party :

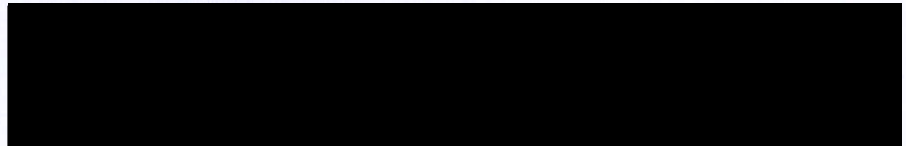

Product :

Switching Power Adapter

Model(s) :

WRP06U-xxxxyyc

(xxx=030-120; yyy=001-100; c=C or U)

Rated input :

100-240V~, 50/60Hz, 0.2A

Rated output :

Refer to the test report for details

Tested according to :

47 CFR FCC Part 15 Subpart B: 2012

This device in conformance with part 15 of the FCC Rules and Regulations for information Technology Equipment.

Operation of this product is subject to the following two conditions:

- 1: This device may not cause harmful interference.
- 2: This device must accept any interference received, including interference that may cause undesired operation.

ATT Product Service Co., Ltd
(CBTL Lab of UL International Demko)

Tel : 86-769-8509 8000 e-mail: att@attps.cnFax: 86-769-8509 8777 <http://www.attps.cn>

Date of issue: 05/31/2013 (mm/dd/yy)



Certification Body

Signature:

Mr. King Wang
(Manager)

TEST REPORT**For Electromagnetic Interference of**

Report Reference No.....: 13FAB05048 11
Tested by (name + signature).....: Billy Li *Billy Li*
Reviewer by (name + signature).....: Tomy Wu *Tomy Wu*
Approved by (name + signature).....: King Wang *King Wang*
Date of issue.....: 2013-05-30

Testing Laboratory: ATT Product Service Co., Ltd
Address.....: No. 3, ChangLianShan Industrial Park, ChangAn Town,
DongGuan City, GuangDong, China.

Applicant's name

Address.....

Manufacturer.....

Test specification:

Test item description: Switching Power Adapter
Trade Mark.....: --
Model/Type reference: WRP06U-xxxxyyc
(xxx=030-120; yyy=001-100; c=C or U)
Ratings.....: I/P: 100-240V~, 50/60Hz, 0.2A
O/P: Refer to page 4 for details.

Table of Contents**Page**

1 . CERTIFICATION	3
2 . SUMMARY OF TEST RESULTS	5
2.1 MEASUREMENT UNCERTAINTY	5
2.2 DESCRIPTION OF TEST MODES	6
3 . EMC EMISSION TEST	7
3.1 CONDUCTED EMISSION MEASUREMENT	7
3.1.1 POWER LINE CONDUCTED EMISSION	7
3.1.2 MEASUREMENT INSTRUMENTS LIST	7
3.1.3 TEST PROCEDURE	8
3.1.4 DEVIATION FROM TEST STANDARD	8
3.1.5 TEST SETUP	8
3.1.6 EUT OPERATING CONDITIONS	8
3.1.7 TEST RESULTS	9
3.2 RADIATED EMISSION MEASUREMENT	15
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	15
3.2.2 MEASUREMENT INSTRUMENTS LIST	16
3.2.3 TEST PROCEDURE	16
3.2.4 DEVIATION FROM TEST STANDARD	16
3.2.5 TEST SETUP	17
3.2.6 EUT OPERATING CONDITIONS	17
3.2.7 TEST RESULTS	18
4 . EUT TEST PHOTO	23

1. CERTIFICATION

Testing Laboratory: ATT Product Service Co., Ltd
Address.....: No. 3, ChangLianShan Industrial Park, ChangAn Town,
DongGuan City, GuangDong, China.

Applicant's name: [REDACTED]
[REDACTED] [REDACTED],

Manufacturer: Same as applicant
Address.....: Same as applicant
Factory.....: Same as applicant
Address.....: Same as applicant

Test specification:

Test item description.....: Switching Power Adapter
Trade Mark: --
Model/Type reference: WRP06U-xxxyyy
(xxx=030-120; yyy=001-100; c=C or U)
Test Sample: WRP06U-050100C, WRP06U-120050U
Ratings.....: I/P: 100-240V~, 50/60Hz, 0.2A
O/P: Refer to page 4 for details.
Tested Power: AC 120V 60Hz
Standards: 47 CFR FCC Part 15 Subpart B: 2012

The device described above was tested by ATT Product Service Co., Ltd to determine the maximum emission levels emanated from the device and severity levels of the device endure and its performance criterion. The measurement results are contained in this test report and ATT Product Service Co., Ltd assumes full responsibility for the accuracy and completeness of these measurements. This report shows the EUT is technically compliance with the Part 15 Subpart B, ANSI C63.4 and CISPR 22 official requirements. This report applies to the above sample only and shall not be reproduced in part without written approval of ATT Product Service Co., Ltd.

1.1 GENERAL PRODUCT INFORMATION

Model No: WRP06U-xxxxyyyc series

Input Rating: 100-240Vac, 50/60Hz, 0.2A Max.

Output Rating: 3.0Vdc-12Vdc, 0.01-1A

Output ratings				
Model No.	Output Voltage(V)	Output Current(A)	Output power (max.W)	Transformer
WRP06U-xxxxyyyc (xxx=030-089,yyy=001-100)	3.0-8.9	0.01-1	5.0	B110083A
WRP06U-xxxxyyyc (xxx=090-120,yyy=001-060)	9-12.0	0.01-1	6.0	WRP-EE13-0912

Variable:	Range of variable:	Content:
xxx	030-120	3 digits, dividing by 10 of output voltage in Vdc.eg:120=12Vdc
yyy	001-100	3 digits, multiply by 10 of output current in mA.eg: 001=10mA
c	C or U	Represent two output type, C represent the output with DC cord, U represent the output with USB connector.

Model different

Transformer	C4	C5	R12(KΩ)	R18(KΩ)	D7
B110083A	max.1000uF, min.10V	max.470uF, min.10V	1K-51K	2K-56K	1-6A,60V-100V
WRP-EE13-0912	max.470uF, min.16V	max.470uF, min.16V	1K-56K	2K-100K	1-3A ,100V

Notice:All models have same circuit diagram, PCB layout except for output rating and transformer T1 (total 2 transformers are used, those transformers has same construction except turns of N2 windings). Besides, for DC output current, the minimum step is 0.01A, output voltage, the minimum step is 0.1V.The output current multiplied by output voltage should not exceed the max.output power °

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

EMC Emission				
Standard	Test Item	Limit	Judgment	Remark
(1)FCC Part 15 (2)CISPR 22 3 rd Edition:2003	Conducted Emission	Class B	PASS	
(3)Canadian ICES-003. Class B	Radiated Emission	Class B	PASS	

2.1 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
C01	ANSI	150 KHz ~ 30MHz	1.94	

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U , (dB)	NOTE
OS02	ANSI	30MHz ~ 200MHz	V	3.82	
		30MHz ~ 200MHz	H	3.60	
		200MHz ~ 1,000MHz	V	3.86	
		200MHz ~ 1,000MHz	H	3.94	

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	FULL LOAD

For Conducted Test	
Final Test Mode	Description
Mode 1	FULL LOAD

For Radiated Test	
Final Test Mode	Description
Mode 1	FULL LOAD

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

3.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Pulse Limiter	MTS-systemtechnik	MTS-IMP-13 6	261115-010-00 24	12/27/2013
2	EMI Test Receiver	R&S	ESCI	101308	12/27/2013
3	LISN	AFJ	LS16	16011103219	12/27/2013

Remark: " N/A" denotes No Model No. , Serial No. or No Calibration specified.


3.1.3 TEST PROCEDURE

- The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.4 DEVIATION FROM TEST STANDARD

No deviation

3.1.5 TEST SETUP

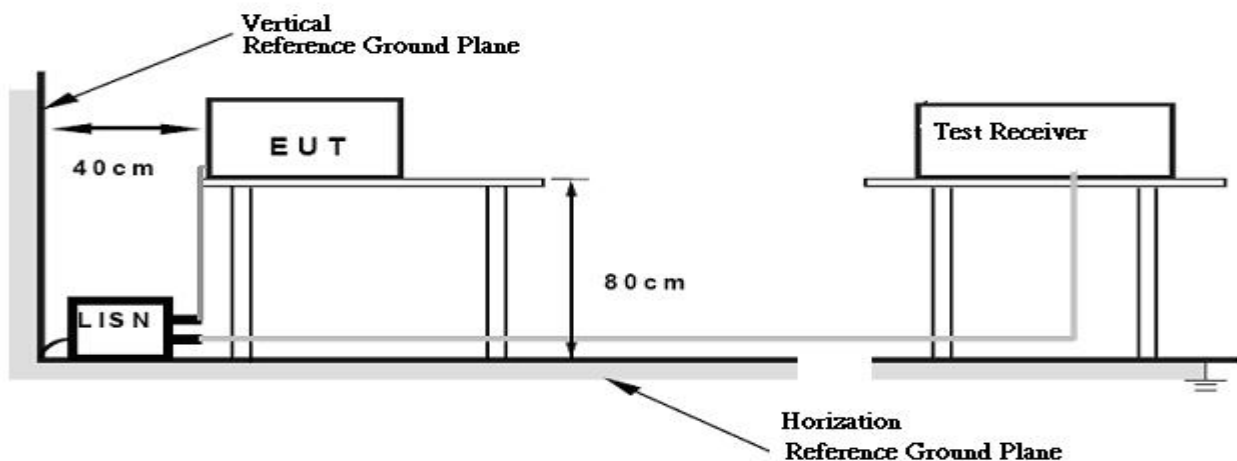

3.1.6 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

3.1.7 TEST RESULTS

EUT :	Switching Power Adapter	Model No. :	WRP06U-120050U
Temperature :	26°C	Relative Humidity :	48 %
Pressure :	1008 hPa	Test Power :	AC 120V/60Hz
Test Mode :	Full Load		

Remark

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz ; SPA setting in RBW=10KHz,VBW =10KHz, Swp. Time = 0.3 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=1MHz,VBW=10Hz, Swp. Time =0.3 sec./MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform.In this case, a “*” marked in AVG Mode column of Interference Voltage Measured.
- (3) Measuring frequency range from 150KHz to 30MHz.




Address: No. 3, ChangLianShan Industrial Park, ChangAn Town,
DongGuan City, GuangDong, China.
Tel: 86-769-8509 8000 Fax: 86-769-8509 8777

Conducted Emission Measurement

File: 威尔普 0618

Data: #3

80.0 dBuV

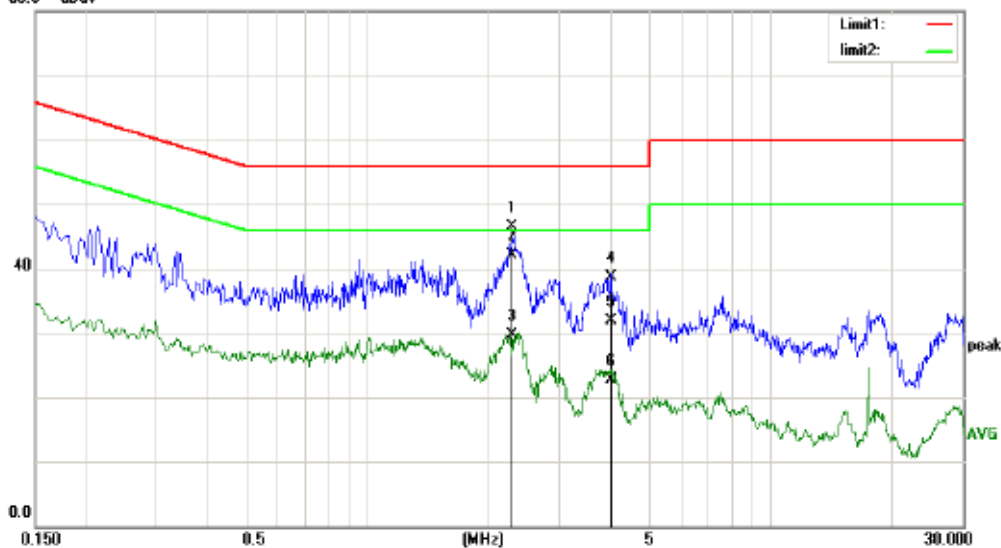

Site :ATT Conducted Emission Test Site

Phase: N

Temperature: 26

Limit: (CE)FCC PART 15 class B_QP

Power: AC 120V/60Hz

Humidity: 60 %

EUT: 12V/0.5A

M/N:

Mode:WRP06U-120050U

Note: FULL LOAD

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dB	Over dB	Detector	Comment
1	*	2.2824	36.31	10.12	46.43	56.00	-9.57	peak	
2		2.2824	31.93	10.12	42.05	56.00	-13.95	QP	
3		2.2824	19.53	10.12	29.65	46.00	-16.35	AVG	
4		4.0257	28.61	10.14	38.75	56.00	-17.25	peak	
5		4.0257	21.82	10.14	31.96	56.00	-24.04	QP	
6		4.0257	12.62	10.14	22.76	46.00	-23.24	AVG	

*:Maximum data x:Over limit !:over margin

File: 威尔普 0618\Data: #3

Page: 1




Address: No. 3, ChangLianShan Industrial Park, ChangAn Town,
 DongGuan City, GuangDong, China.
 Tel: 86-769-8509 8000 Fax: 86-769-8509 8777

Conducted Emission Measurement

File: 威尔普 0618

Data: #4

80.0 dBuV

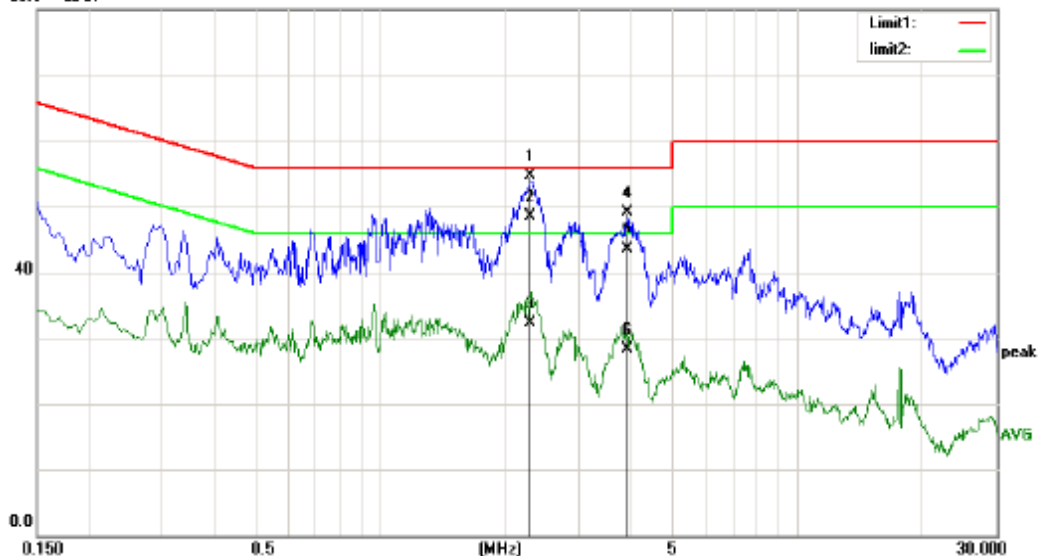

Site: ATT Conducted Emission Test Site

Phase: L1

Temperature: 28

Limit: (CE)FCC PART 15 class B_QP

Power: AC 120V/60Hz

Humidity: 60 %

EUT: 12V/0.5A

M/N:

Mode: WRP06U-120050U

Note: FULL LOAD

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dB	Over dB	Detector	Comment
1	*	2.2912	44.53	10.12	54.65	56.00	-1.35	peak	
2		2.2912	38.40	10.12	48.52	56.00	-7.48	QP	
3		2.2912	22.18	10.12	32.30	46.00	-13.70	AVG	
4		3.9237	38.90	10.14	49.04	56.00	-6.96	peak	
5		3.9237	33.43	10.14	43.57	56.00	-12.43	QP	
6		3.9237	18.18	10.14	28.32	46.00	-17.68	AVG	

*:Maximum data x:Over limit !:over margin

File: 威尔普 0618/Data: #4

Page: 1

3.1.8 TEST RESULTS

EUT :	Switching Power Adapter	Model No. :	WRP06U-050100C
Temperature :	26℃	Relative Humidity :	48 %
Pressure :	1008 hPa	Test Power :	AC 120V/60Hz
Test Mode :	Full Load		

Remark

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz ; SPA setting in RBW=10KHz,VBW =10KHz, Swp. Time = 0.3 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=1MHz,VBW=10Hz, Swp. Time =0.3 sec./MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a " * " marked in AVG Mode column of Interference Voltage Measured.
- (3) Measuring frequency range from 150KHz to 30MHz.




Address: No. 3, ChangLianShan Industrial Park, ChangAn Town,
 DongGuan City, GuangDong, China.
 Tel: 86-769-8509 8000 Fax: 86-769-8509 8777

Conducted Emission Measurement

File: 威尔普 0618

Data: #5

80.0 dBuV

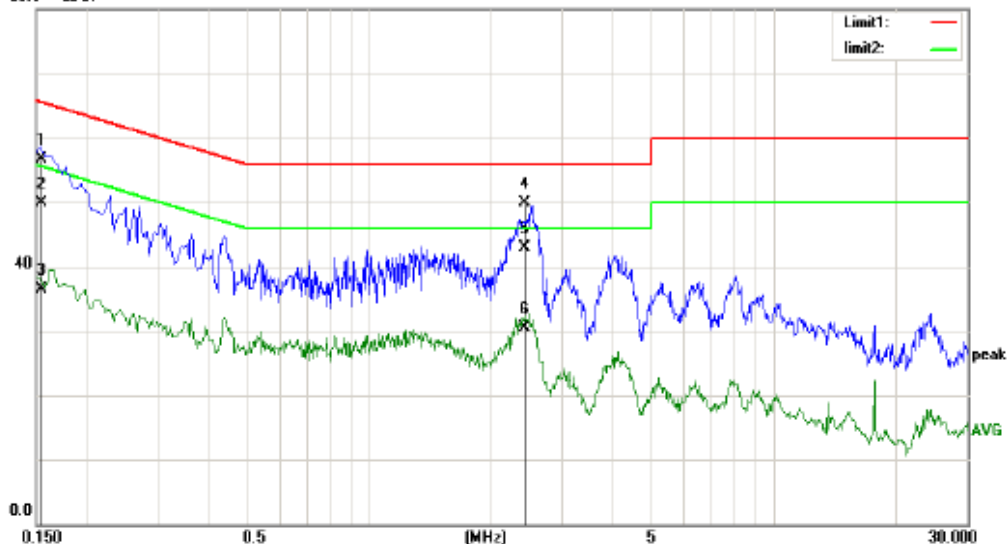

Site :ATT Conducted Emission Test Site

Phase: L1

Temperature: 26

Limit: (CE)FCC PART 15 class B_QP

Power: AC 120V/60Hz

Humidity: 60 %

EUT: 5V/1A

M/N:

Mode:WRP06U-050100C

Note: FULL LOAD

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dB	Over dB	Detector	Comment
1		0.1555	45.25	11.43	56.68	65.70	-9.02	peak	
2		0.1555	38.52	11.43	49.95	65.70	-15.75	QP	
3		0.1555	25.09	11.43	36.52	55.70	-19.18	AVG	
4	*	2.4348	39.84	10.12	49.96	56.00	-6.04	peak	
5		2.4348	32.69	10.12	42.81	56.00	-13.19	QP	
6		2.4348	20.29	10.12	30.41	46.00	-15.59	AVG	

*:Maximum data x:Over limit !:over margin

File: 威尔普 0618\Data: #5

Page: 1




Address: No. 3, ChangLianShan Industrial Park, ChangAn Town,
DongGuan City, GuangDong, China.
Tel: 86-769-8509 8000 Fax: 86-769-8509 8777

Conducted Emission Measurement

File: 威尔普 0618

Data: #6

80.0 dBuV

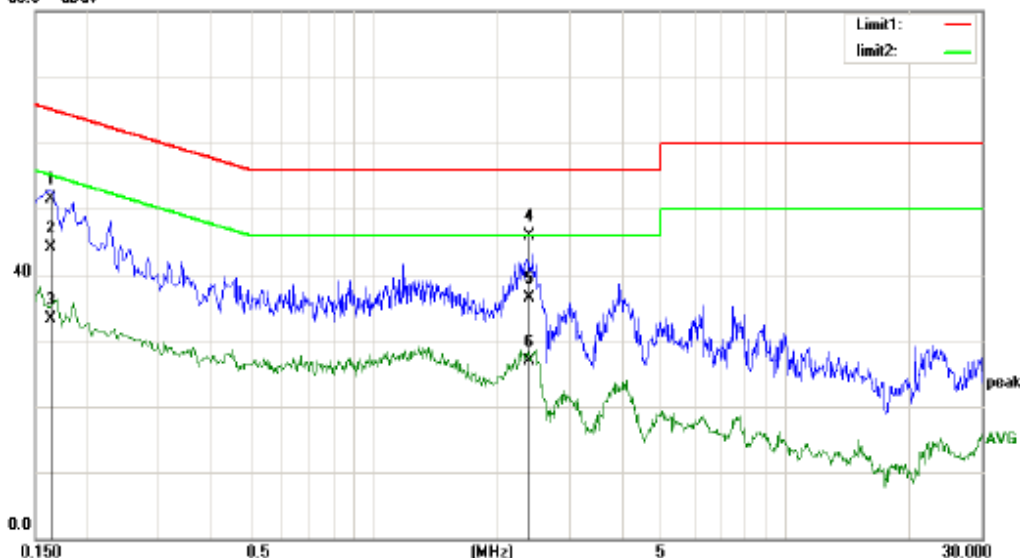

Site: ATT Conducted Emission Test Site

Phase: N

Temperature: 28

Limit: (CE)FCC PART 15 class B_QP

Power: AC 120V/60Hz

Humidity: 60 %

EUT: 5V/1A

M/N:

Mode: WRP06U-050100C

Note: FULL LOAD

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dB	Over dB	Detector	Comment
1		0.1645	40.08	11.37	51.45	65.23	-13.78	peak	
2		0.1645	32.74	11.37	44.11	65.23	-21.12	QP	
3		0.1645	22.01	11.37	33.38	55.23	-21.85	AVG	
4 *		2.3895	35.81	10.12	45.93	56.00	-10.07	peak	
5		2.3895	26.33	10.12	36.45	56.00	-19.55	QP	
6		2.3895	16.80	10.12	26.92	46.00	-19.08	AVG	

*:Maximum data x:Over limit !:over margin

File: 威尔普 0618\Data: #6

Page: 1

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

(Below 1000MHz)

☐ CISPR 22 Class B Limit at 10m

FREQUENCY (MHz)	Field strengths limited at 10 measuring distance: dBuV/m	Field streng limited at 3m measuring distance: dBuV/m
30 – 230	30	40
230 – 1000	37	47

Notes:

- (1) The limit for radiated test was performed according to as following:
CISPR 22/ FCC PART 15B /ICES-003.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80	60	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15B.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

FREQUENCY RANGE OF RADIATED MEASUREMENT (For FCC)

☒ FCC Class B Limit at 3m

Frequency	Distance	Field Strength	
MHz	Meter	$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
30 to 88	3	100	40.0
88 to 216	3	150	43.5
216 to 960	3	200	46.0
Above 960	3	500	54.0

☐ FCC Class A Limit at 10m

Frequency	Distance	Field Strength	
MHz	Meter	$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
30 to 88	10	90	39.0
88 to 216	10	150	43.5
216 to 960	10	210	46.4
Above 960	10	300	49.5

3.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Log-Bicon Antenna	SCHWARZBECK	VULB9168	VULB9168-192	01/03/2014
2	Pre-Amplifier	HP	8447F	3113A05680	12/27/2013
3	EMI Test Receiver	R&S	ESCI	101307	12/27/2013
4	Spectrum Analyzer	Agilent	E4407B	US40240708	07/30/2013
5	HORN Antenna	SCHWARZBECK	BBHA 9120D	BBHA 9120D 1065	12/27/2013
6	PRE-Amplifier	CY	EMC011830	980136	12/27/2013
7	Turn Table	UC	UC3000	N/A	N.C.R.
8	Antenna Mast	UC	UC3000	N/A	N.C.R.

Remark: " N/A" denotes No Model No. / Serial No. and No Calibration specified.


3.2.3 TEST PROCEDURE

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m or 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.2.4 DEVIATION FROM TEST STANDARD

No deviation

3.2.5 TEST SETUP

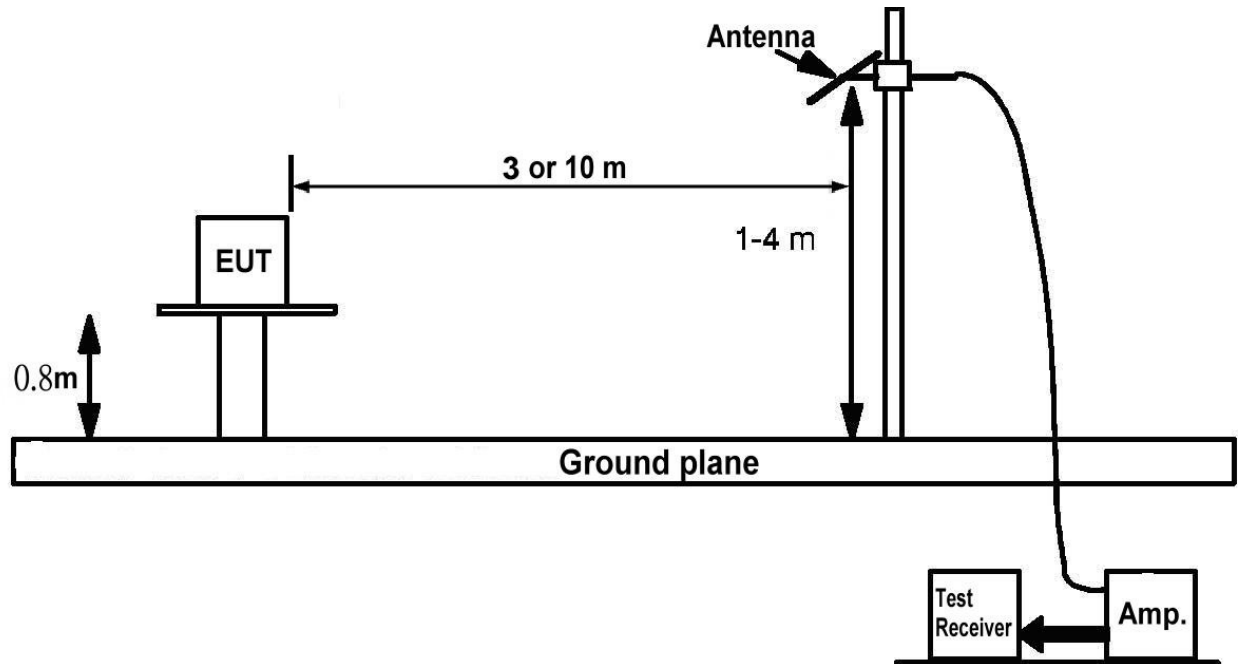

3.2.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.2 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.7 TEST RESULTS

EUT :	Switching Power Adapter	Model No. :	WRP06U-120050U
Temperature :	26 °C	Relative Humidity :	48 %
Pressure :	1009 hPa	Test Power :	AC 120V/60Hz
Test Mode :	Full Load		

Remark :

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note 』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measure-ment didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not how in table.




Address: No. 3, ChangLianShan Industrial Park, ChangAn Town,
DongGuan City, GuangDong, China.
Tel: 86-769-8509 8000 Fax: 86-769-8509 8777

Radiated Emission Measurement

File: 威尔普 0620

Data: #1

80.0 dBuV/m

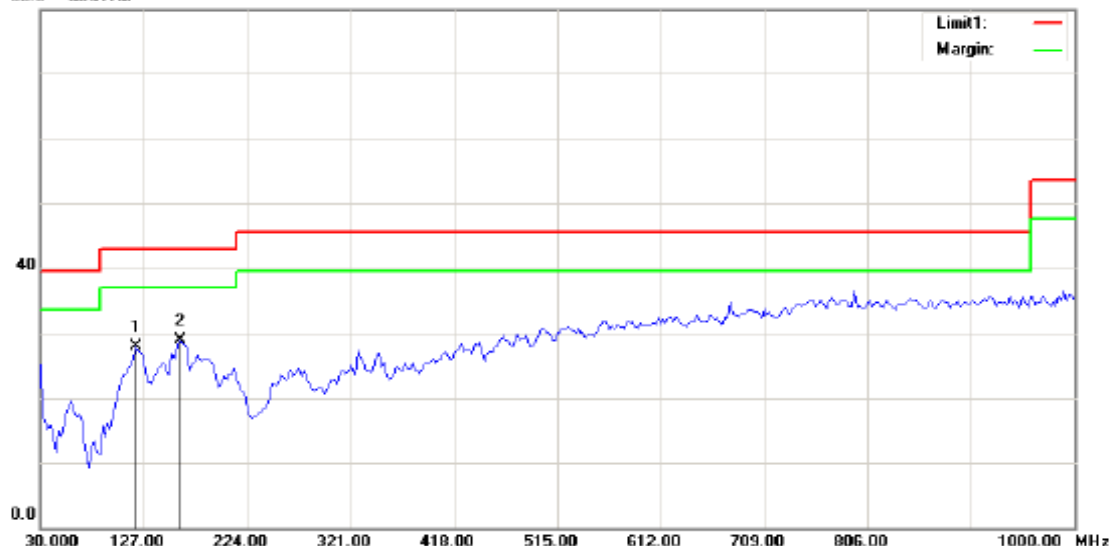

Site: ATT Radiated Emission Test Site

Polarization: *Horizontal*

Temperature: 26

Limit: (RE)FCC PART 15 class B 3m

Power: AC 120V/60Hz

Humidity: 60 %

EUT: 5V/1A

Distance: 3m

M/N:

Mode: WRP06U-120050U

Note: FULL LOAD

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		119.7250	43.54	-15.70	27.84	43.00	-15.16	peak		
2	*	160.9500	41.81	-12.97	28.84	43.00	-14.16	peak		

*:Maximum data x:Over limit !:over margin

File: 威尔普 0620\Data: #1

Page: 1




Address: No. 3, ChangLianShan Industrial Park, ChangAn Town,
DongGuan City, GuangDong, China.
Tel: 86-769-8509 8000 Fax: 86-769-8509 8777

Radiated Emission Measurement

File: 威尔普 0620

Data: #2

00.0 dBuV/m

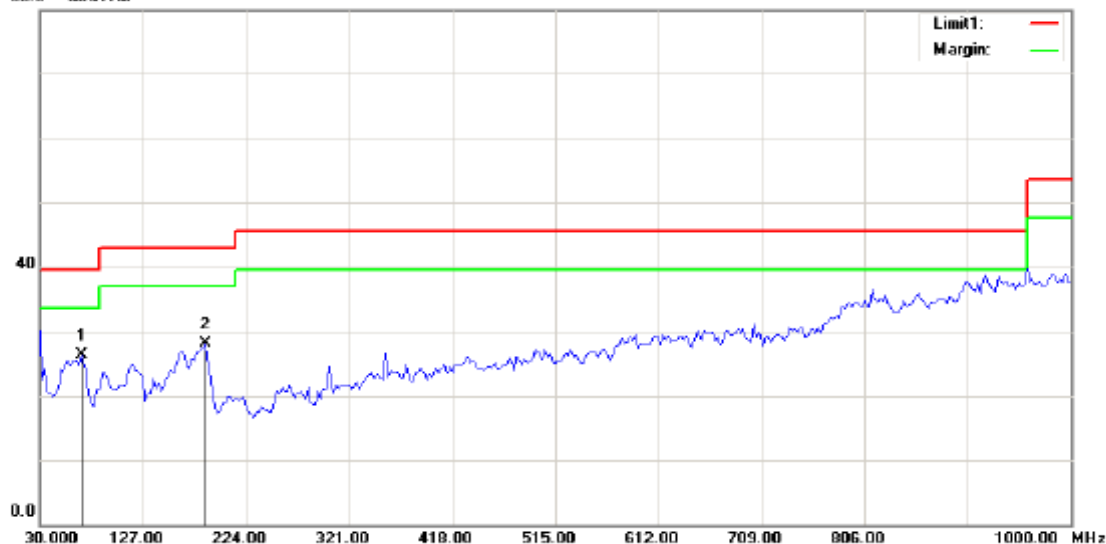

Site: ATT Radiated Emission Test Site

Polarization: *Vertical*

Temperature: 26

Limit: (RE)FCC PART 15 class B 3m

Power: AC 120V/60Hz

Humidity: 60 %

EUT: 5V/1A

Distance: 3m

M/N:

Mode: WRP06U-120050U

Note: FULL LOAD

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	68.8000	31.94	-5.55	26.39	39.50	-13.11	peak		
2		185.2000	30.56	-2.42	28.14	43.00	-14.86	peak		

*:Maximum data x:Over limit !:over margin

File: 威尔普 0620\Data: #2

Page: 1

3.2.8 TEST RESULTS

EUT :	Switching Power Adapter	Model No. :	WRP06U-050100C
Temperature :	26 °C	Relative Humidity :	48 %
Pressure :	1009 hPa	Test Power :	AC 120V/60Hz
Test Mode :	Full Load		

Remark :

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note 』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measure-ment didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not how in table.




Address: No. 3, ChangLianShan Industrial Park, ChangAn Town,
DongGuan City, GuangDong, China.
Tel: 86-769-8509 8000 Fax: 86-769-8509 8777

Radiated Emission Measurement

File: 威尔普 0620

Data: #3

00.0 dBuV/m

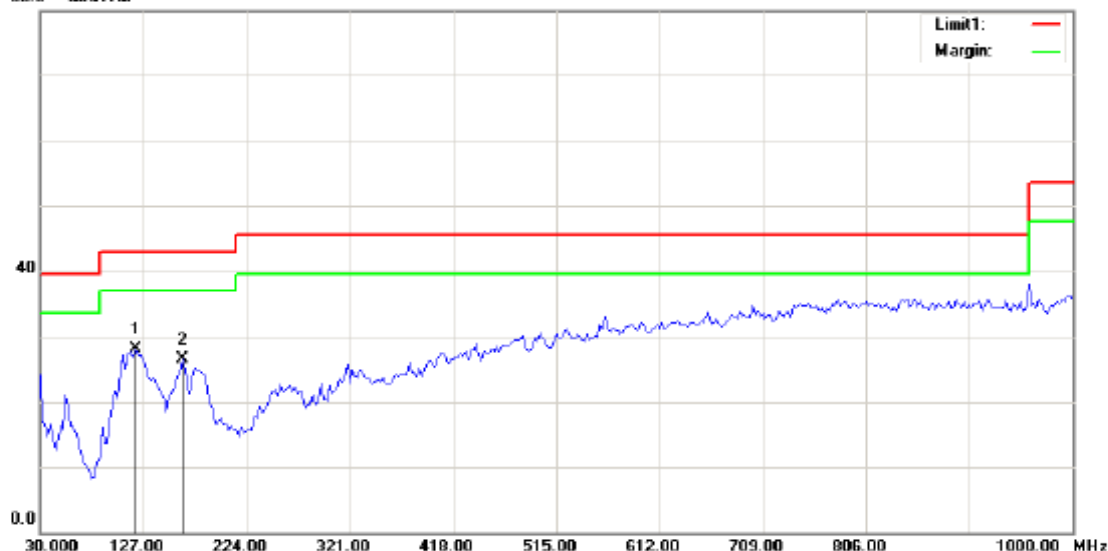

Site: ATT Radiated Emission Test Site

Limit: (RE)FCC PART 15 class B 3m

EUT: 12V/0.5A

M/N:

Mode: WRP06U-050100C

Note: FULL LOAD

Polarization: *Horizontal*

Temperature: 26

Power: AC 120V/60Hz

Humidity: 60 %

Distance: 3m

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	119.7250	43.72	-15.70	28.02	43.00	-14.98	peak		
2		163.3750	39.60	-13.10	26.50	43.00	-16.50	peak		

*:Maximum data x:Over limit !:over margin

File: 威尔普 0620\Data: #3


Page: 1

4. EUT TEST PHOTO

Conducted Measurement Photos



Radiated Measurement Photos

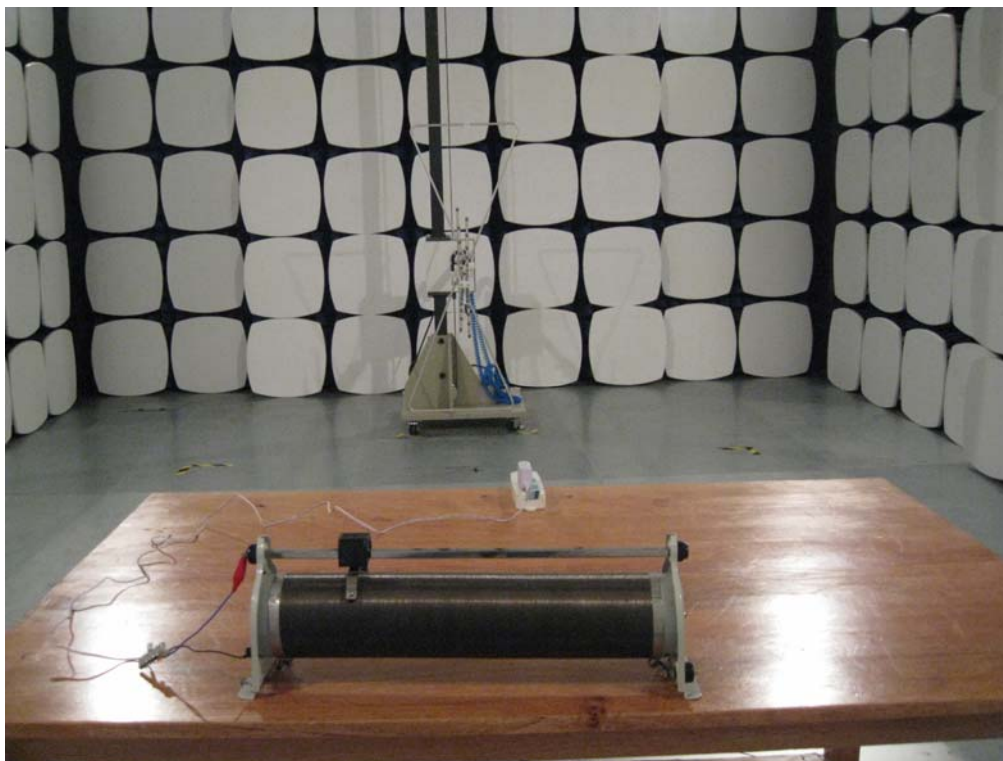

EUT Photo